

WALL MOUNTED

Basic : ASYG07LLCC / ASYG09LLCC / ASYG12LLCC




Wireless R.C.



SPLIT


Features

High efficient compact design

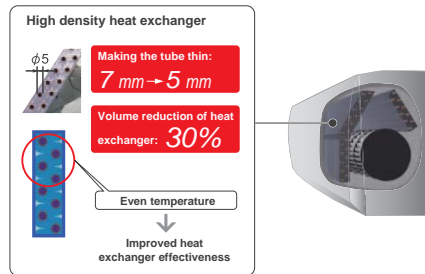

ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style.
(Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)



Super Quiet Operation

Top class low noise operation by new airflow construction. Our quiet operation makes the more comfortable environment in a bed room and a study room, etc.

Fan speed **Quiet**


Noise level **22 dB (A)**

Powerful operation


20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

Economy operation

Setting temp. is shifted by 1°C automatically.

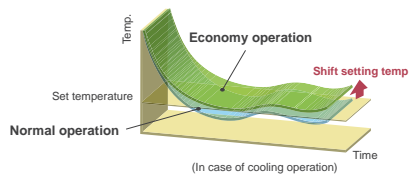

Low ambient operation



Optional parts

Remote Controller Holder: UTZ-RXLA

Specifications

Model No.	Indoor unit		ASYG07LLCC	ASYG09LLCC	ASYG12LLCC
	Outdoor unit		AOYG07LLCC	AOYG09LLCC	AOYG12LLCC
Power Source	V/Ø/Hz		230/1/50	230/1/50	230/1/50
Capacity	Cooling	kW	2.0 (0.9-2.8)	2.5 (0.9-3.0)	3.4 (0.9-3.8)
	Heating		2.7 (0.9-3.6)	3.0 (0.9-3.8)	4.0 (0.9-5.0)
Input Power	Cooling/Heating	kW	0.470/0.620	0.730/0.740	1.080/1.130
EER	Cooling	W/W	4.26	3.42	3.15
	Heating		4.35	4.05	3.54
Pdesign	Cooling/Heating (@-10°C)	kW	2.0/2.2	2.5/2.3	3.4/3.2
	Cooling	W/W	6.70	6.90	6.60
SCOP	Heating (Average)	W/W	4.00	4.00	3.80
	Cooling		A++	A++	A++
Energy Efficiency Class	Heating (Average)	A	A+	A+	A
	Cooling/Heating		A	A	A
Running Current	Cooling/Heating	A	2.6/3.0	3.5/3.5	5.2/5.4
Annual Energy Consumption	Cooling	kWh/a	104	127	180
	Heating		770	805	1,179
Moisture Removal	l/h		1.0	1.3	1.8
Sound Pressure (Cooling)	Indoor / Outdoor	H/M/L/Q	43/38/33/22		43/38/33/22
		High	47		50
		dB(A)	59		59
Sound Power (Cooling)	Indoor / Outdoor	High	61		65
		High	59		59
		dB(A)	61		65
Airflow Rate (High)	Indoor / Outdoor	m³/h	720/1,670	720/1,670	720/1,830
		mm	262x820x206	262x820x206	262x820x206
Net Dimension H x W x D	Indoor	kg(lbs)	7.0 (15)	7.0 (15)	7.0 (15)
		mm	535x663x293	535x663x293	535x663x293
	Outdoor	kg(lbs)	24 (53)	24 (53)	26 (57)
		mm	6.35/9.52	6.35/9.52	6.35/9.52
Piping Connections (Small / Large)	mm		13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Drain Hose Diameter (I.D./O.D.)	mm		20 (15)	20 (15)	20 (15)
Max Pipe Length (Pre-Charge)	m		15	15	15
Max Height Difference	Cooling	°CDB	-10 to 43	-10 to 43	-10 to 43
			Heating	-15 to 24	-15 to 24
Refrigerant (Global Warming Potential)			R410A (1,975)	R410A (1,975)	R410A (1,975)

Dimensions Models : ASYG07LLCC / ASYG09LLCC / ASYG12LLCC

(Unit : mm)

